



Redplus4 Controller Configuration

Internal cabling

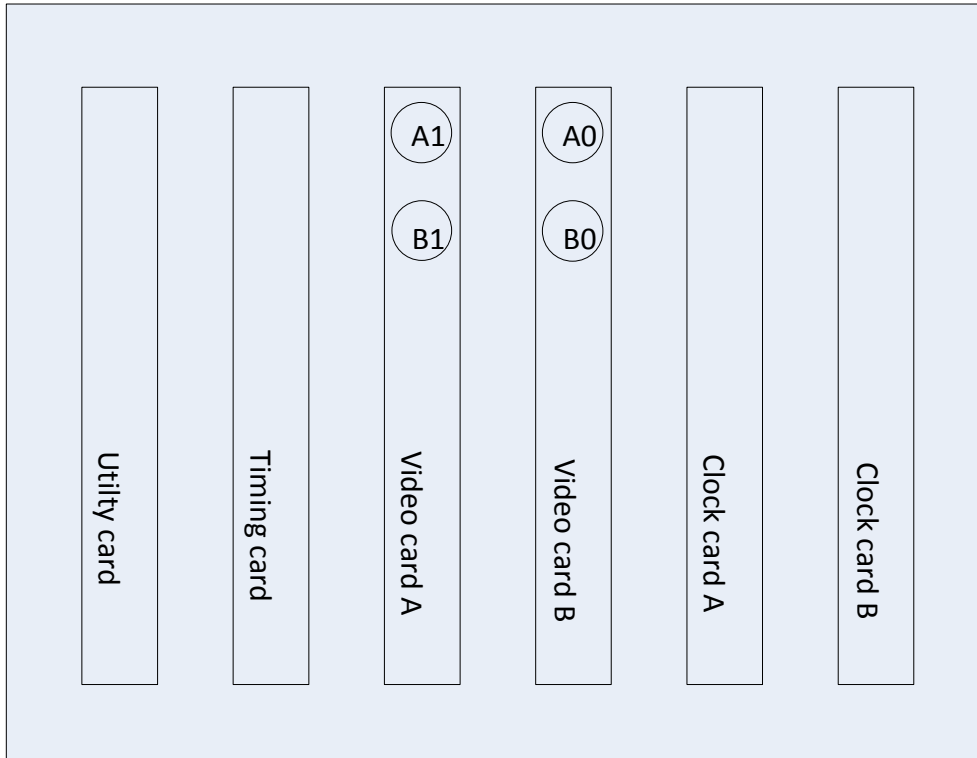



External signal cabling

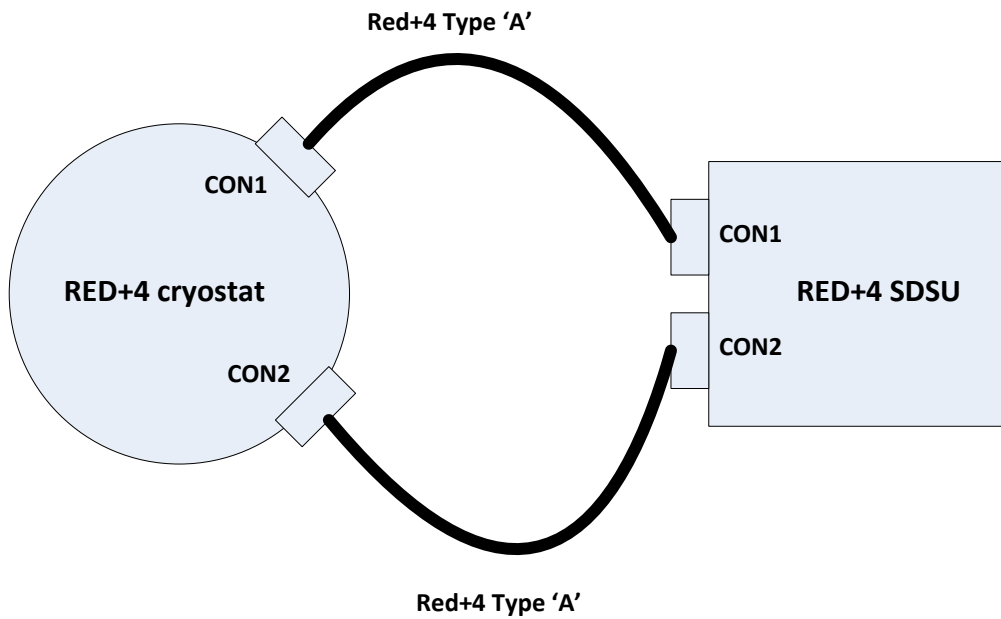


N.B. Red+4 Type 'B' cables exist but should not be used for single amp operation.

Redplus4 Controller Configuration



Clock

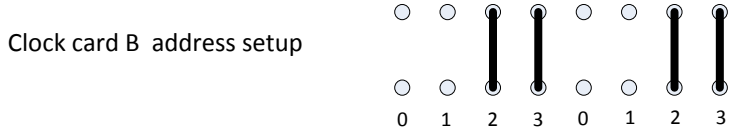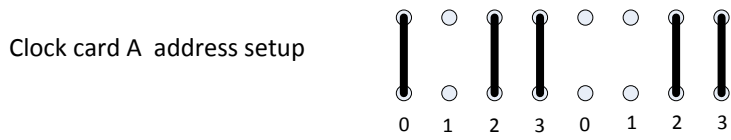

Both clock cards require shaping 10nF ceramic capacitors for the parallel clocks, see below

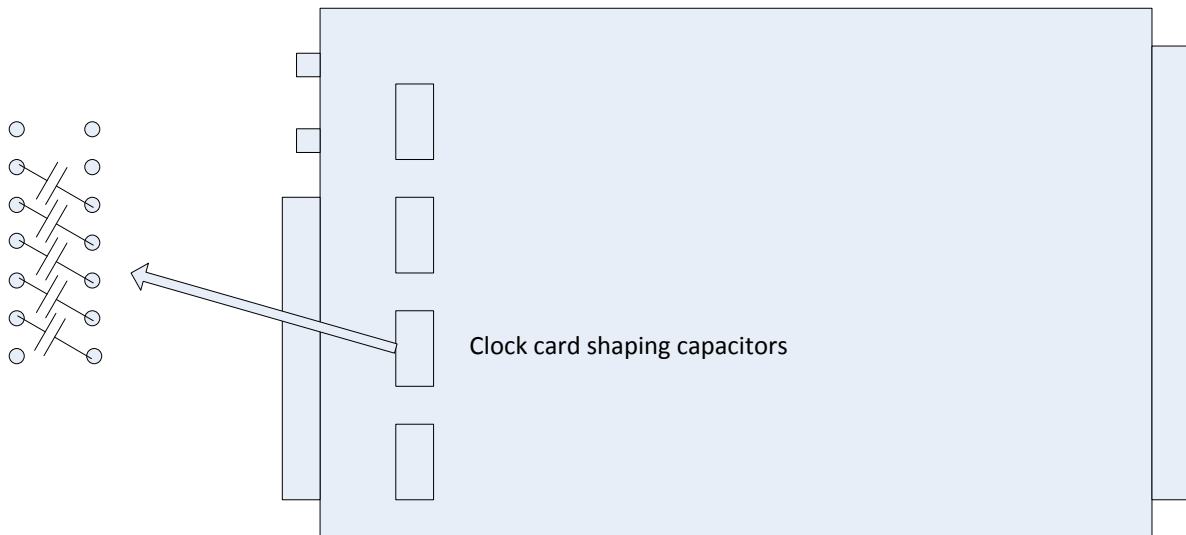

Video

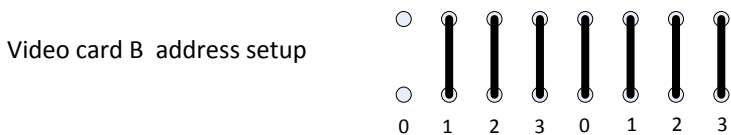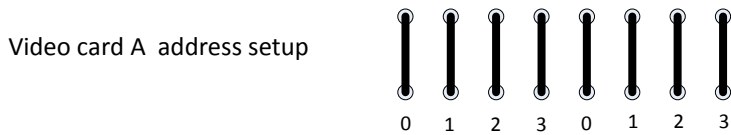

Both video card CCD OS load resistors (R1 & R51) are 5K1 (metal film) on both video cards